



The Aerosol/Cloud/Ecosystems Mission (ACE)

Mark Schoeberl
NASA/GSFC



What is ACE?

ACE will help to answer emerging fundamental science questions associated with aerosols, clouds, air quality and global ocean ecosystems.

- Quantify aerosol-cloud interaction and assess the impact of aerosols on the hydrological cycle.
- Determine Ocean Carbon Cycling and other ocean biological processes.

Why two goals?

- Ocean biology measurements and Aerosols meet at the algorithm level
 - Accurate estimation of the aerosol contribution to the backscatter radiation are required to make precise ocean biosphere measurements.
 - Aerosol interference with ocean color measurements has been a major limitation in past missions
- But, there are common science problems between the two communities as well!
 - Fertilization of the ocean by dust; What is will happen in the future with climate change?
 - Aerosol formation by oceanic emitted DMS; How will ecosystem generation of aerosols affect the planetary energy budget?

Expected impacts

- ACE will narrow the uncertainty in aerosol-cloud-precipitation interaction and quantify the role of aerosols in climate change.
- ACE will measure the ocean ecosystem changes and precisely quantify ocean carbon uptake.
- ACE measurements will improve air quality forecasting by determining the height and type of aerosols being transported long distances.



NAS Decadal Survey Description of ACE

Goddard
Space
Flight Center

- Objective: "...reduce the uncertainty in climate forcing in aerosol-cloud interactions and ocean ecosystem CO₂ uptake" - Decadal Survey pg 4-4
- Mission and Payload: ... LEO, sun-synchronous early-afternoon orbit. The orbit altitude of 500-650 km. The NAS mission consisted of four instruments:
 - A **multi-beam cross-track dual wavelength lidar** for measurement of cloud and aerosol heights and layer thickness;
 - A **cross-track scanning cloud radar*** with channels at 94 GHz and possibly 34 GHz for cloud droplet size, glaciation height, and cloud height;
 - A **highly accurate multiangle - multiwavelength polarimeter** to measure cloud and aerosol properties (This instrument, would have a cross-track and along-track swath with ~1 km pixel size.)
 - A **multi-band cross-track visible/UV spectrometer** with ~1 km pixel size, including Aqua MODIS, NPP VIIRS, and Aura OMI aerosol retrieval bands and *additional bands for ocean color and dissolved organic matter.*"

* Doppler would be desirable too




ACE Science Objectives Extended

Goddard
Space
Flight Center

➤ ACE Extended – the ACOB mission


- NASA-sponsored workshops concluded that ACE should include **more cloud measurement capabilities and assess the role of precipitation in aerosol-cloud interaction**. This could be done by adding high and low frequency μ -wave radiometers to the potential payload.
 - The ACE SWG published a science White Paper that specifically addresses the rationale, requirements and resulting measurements associated with the ACOB mission.
- Thus, Aerosol Climate and Ocean Biology (ACOB) is identical to ACE except for two μ -wave radiometers that strengthen the measurement of clouds and precipitation -- ACOB adds **significant** science.
 - The addition of the μ -wave radiometers broadens the ACE swath
 - Consistent with “Vital Skies” white paper recommendation that preceded the ACE white paper.
- Adding μ -wave radiometers will increase the cost slightly

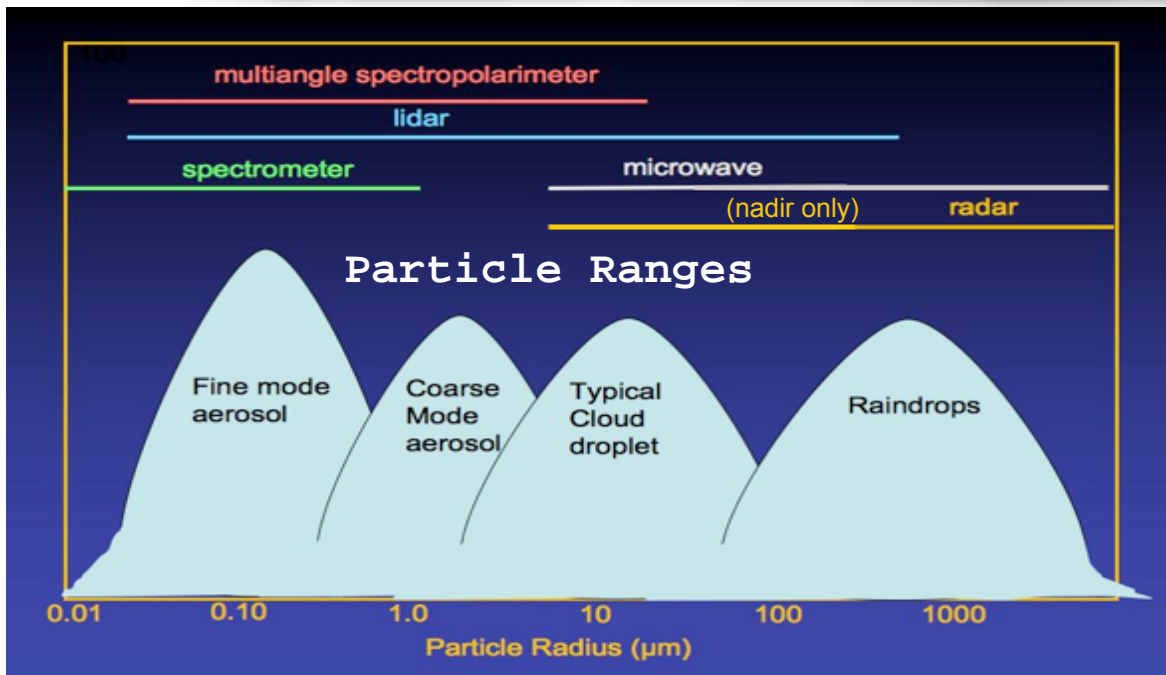

In order to understand the interaction between pollution, clouds and precipitation and to address air quality we need measurements that are sensitive to:

- particle distribution from fine mode to raindrops
- aerosol and cloud particle optical properties
- aerosol and cloud heights
- aerosol composition

Following the measurement suite pioneered by the A-Train, a combination of active and remote multi-wavelength sensors is needed.

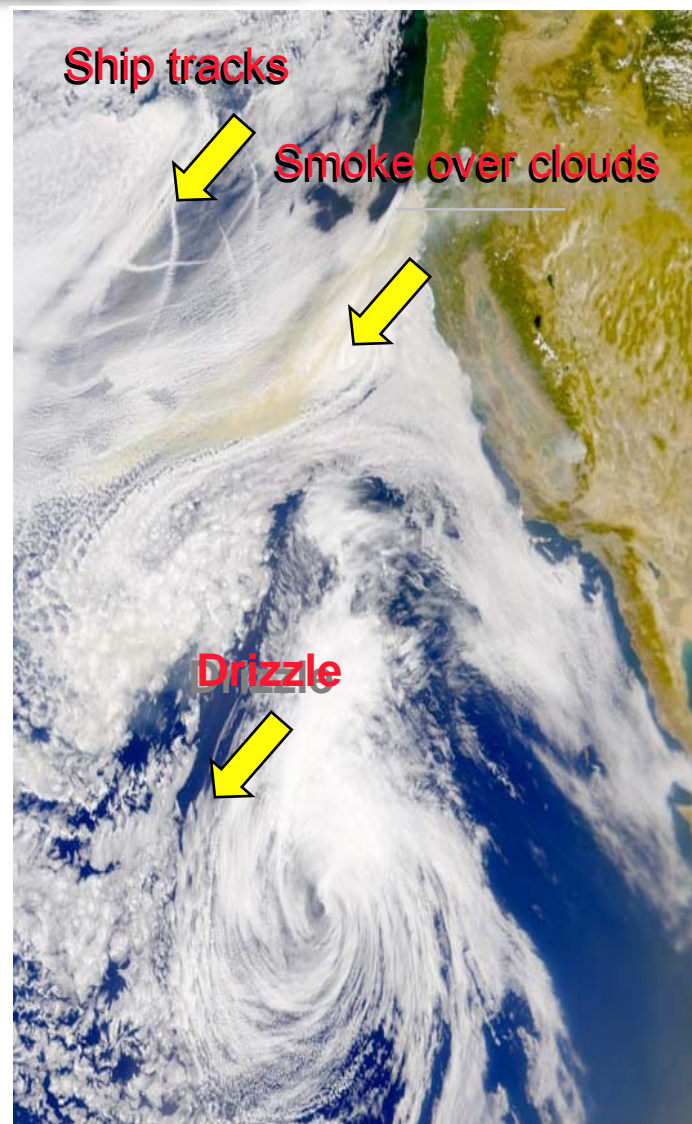




Aerosol and Cloud Observations over South Asia

MODIS

Pollution

Dust source

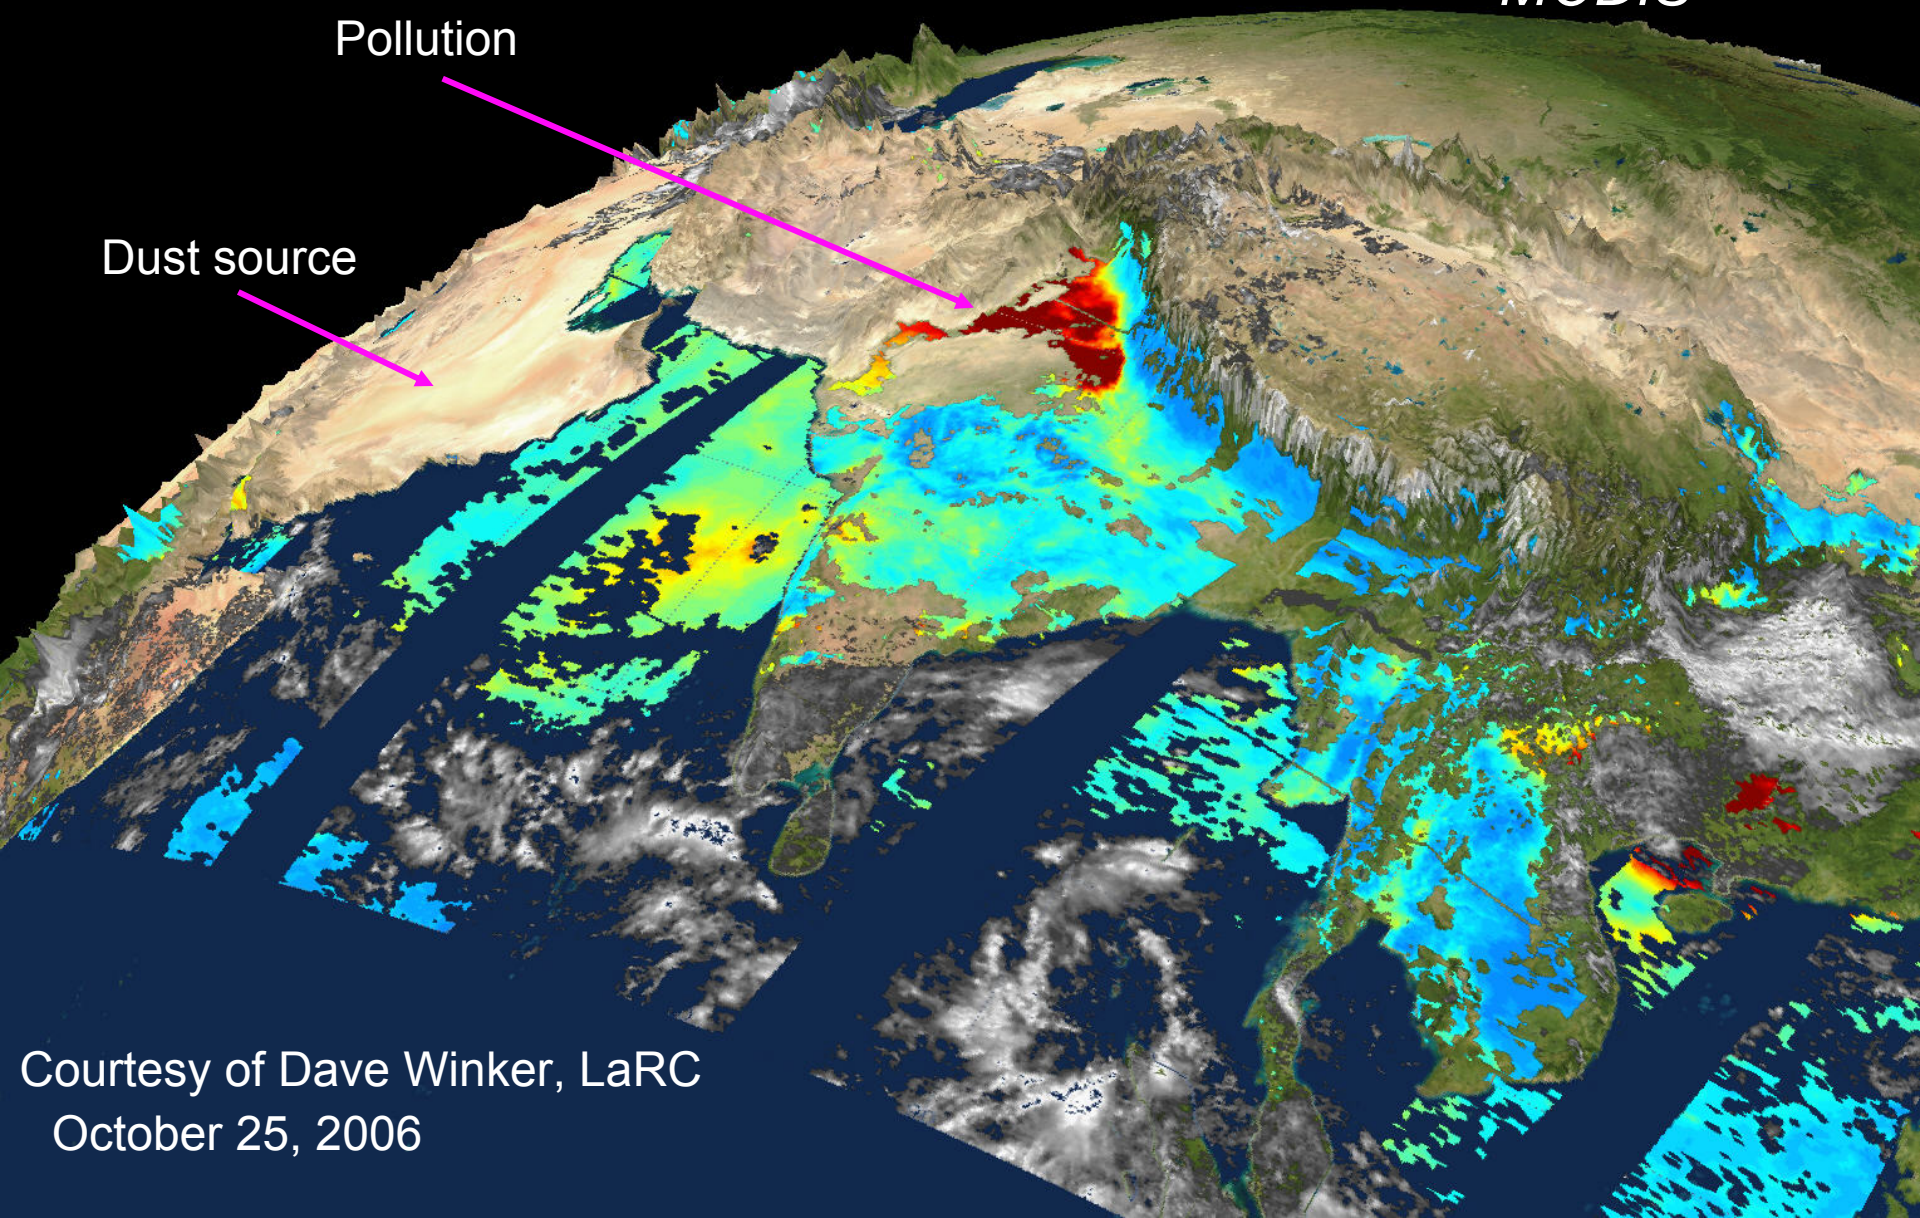


Courtesy of Dave Winker, LaRC
October 25, 2006



Aerosol and Cloud Observations over South Asia

Lidar Measurements add the third dimension...

CALIPSO + MODIS

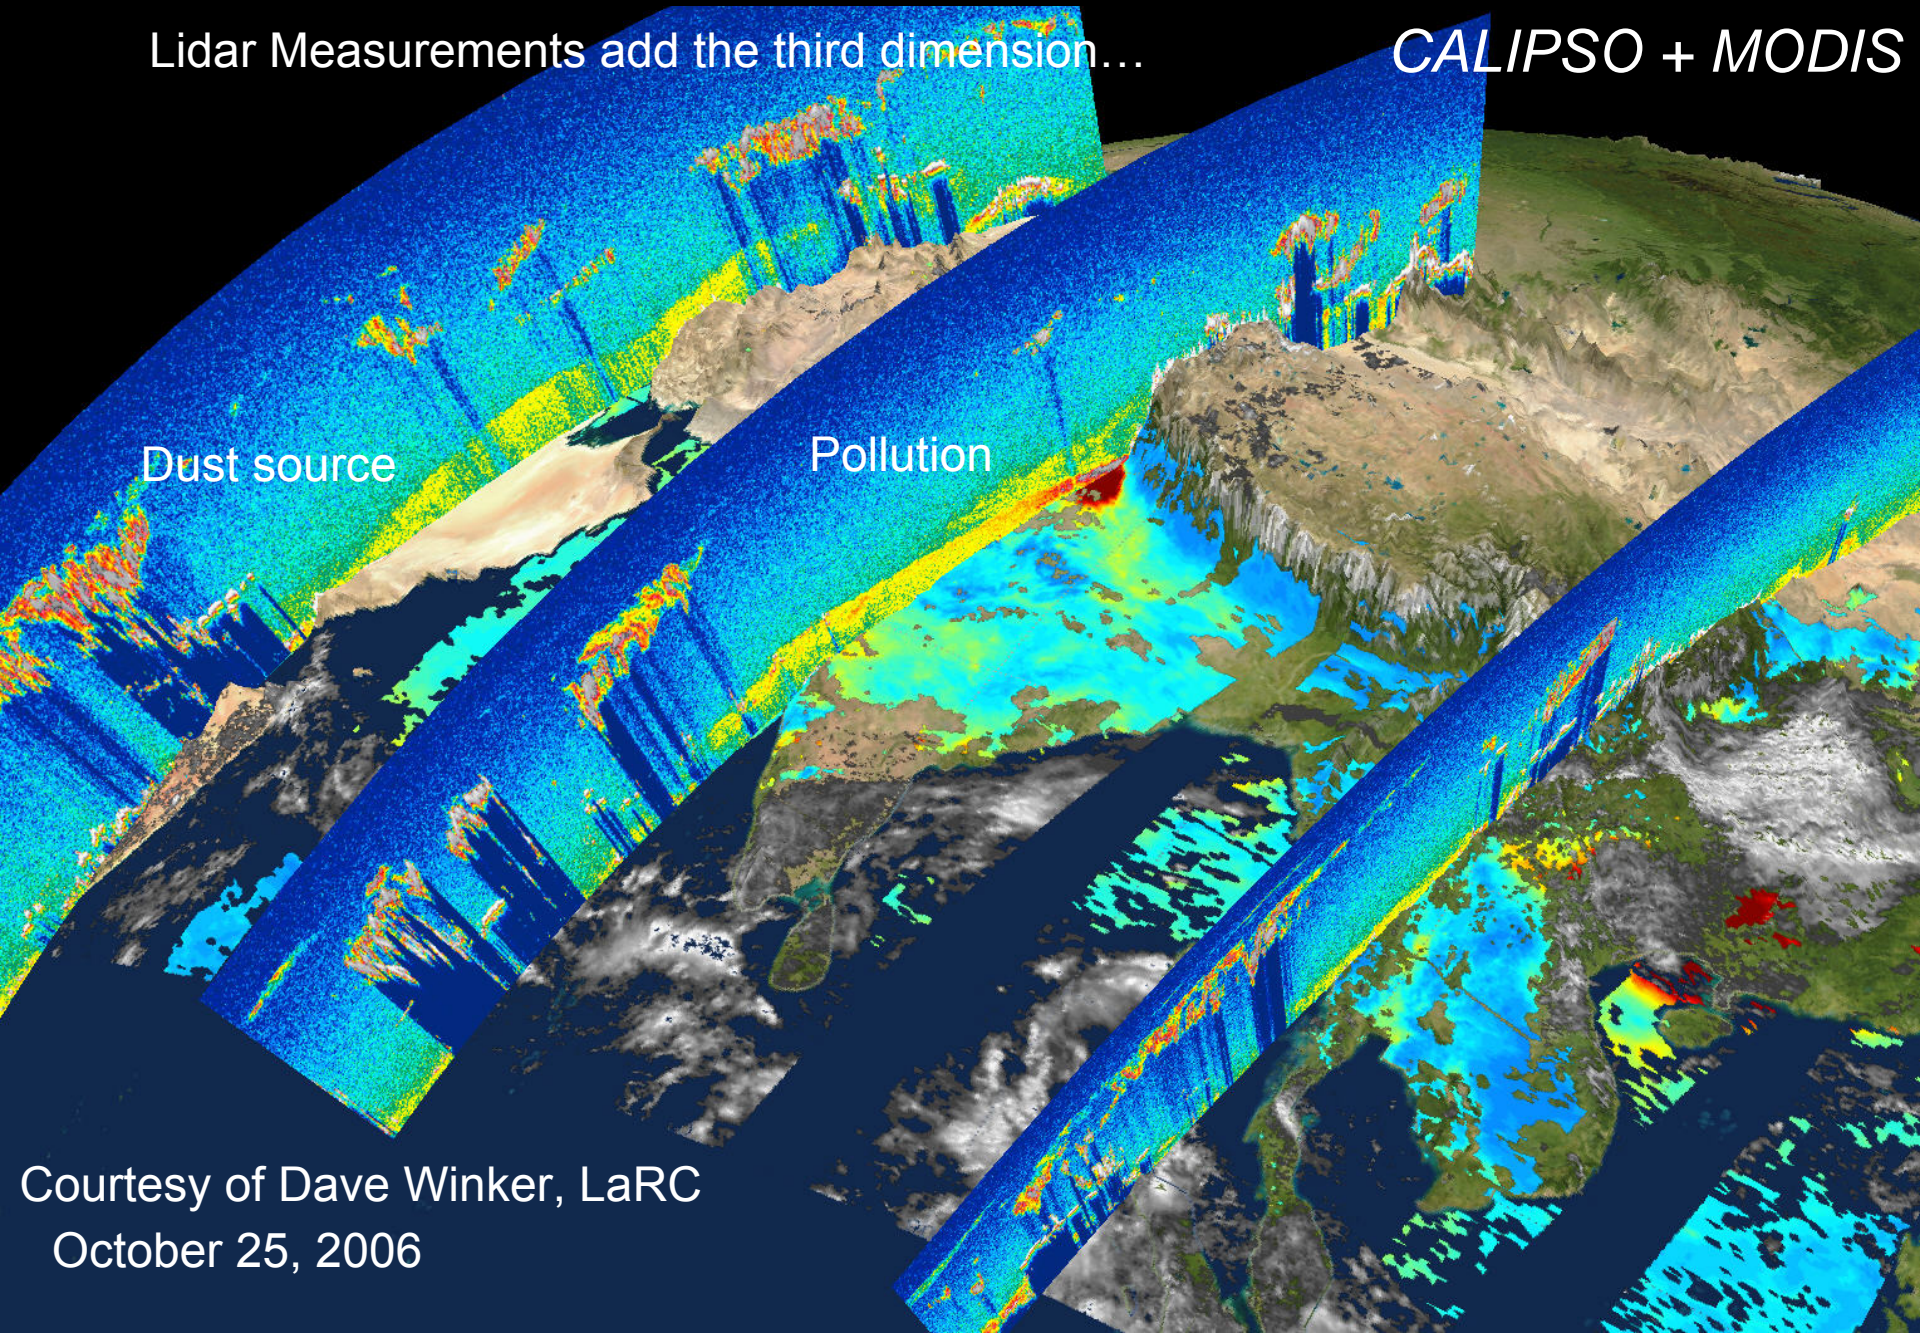


Courtesy of Dave Winker, LaRC
October 25, 2006



Ocean Biology Research Goals

Goddard
Space
Flight Center

ACE Ocean Measurements Trace Directly to Science Goals

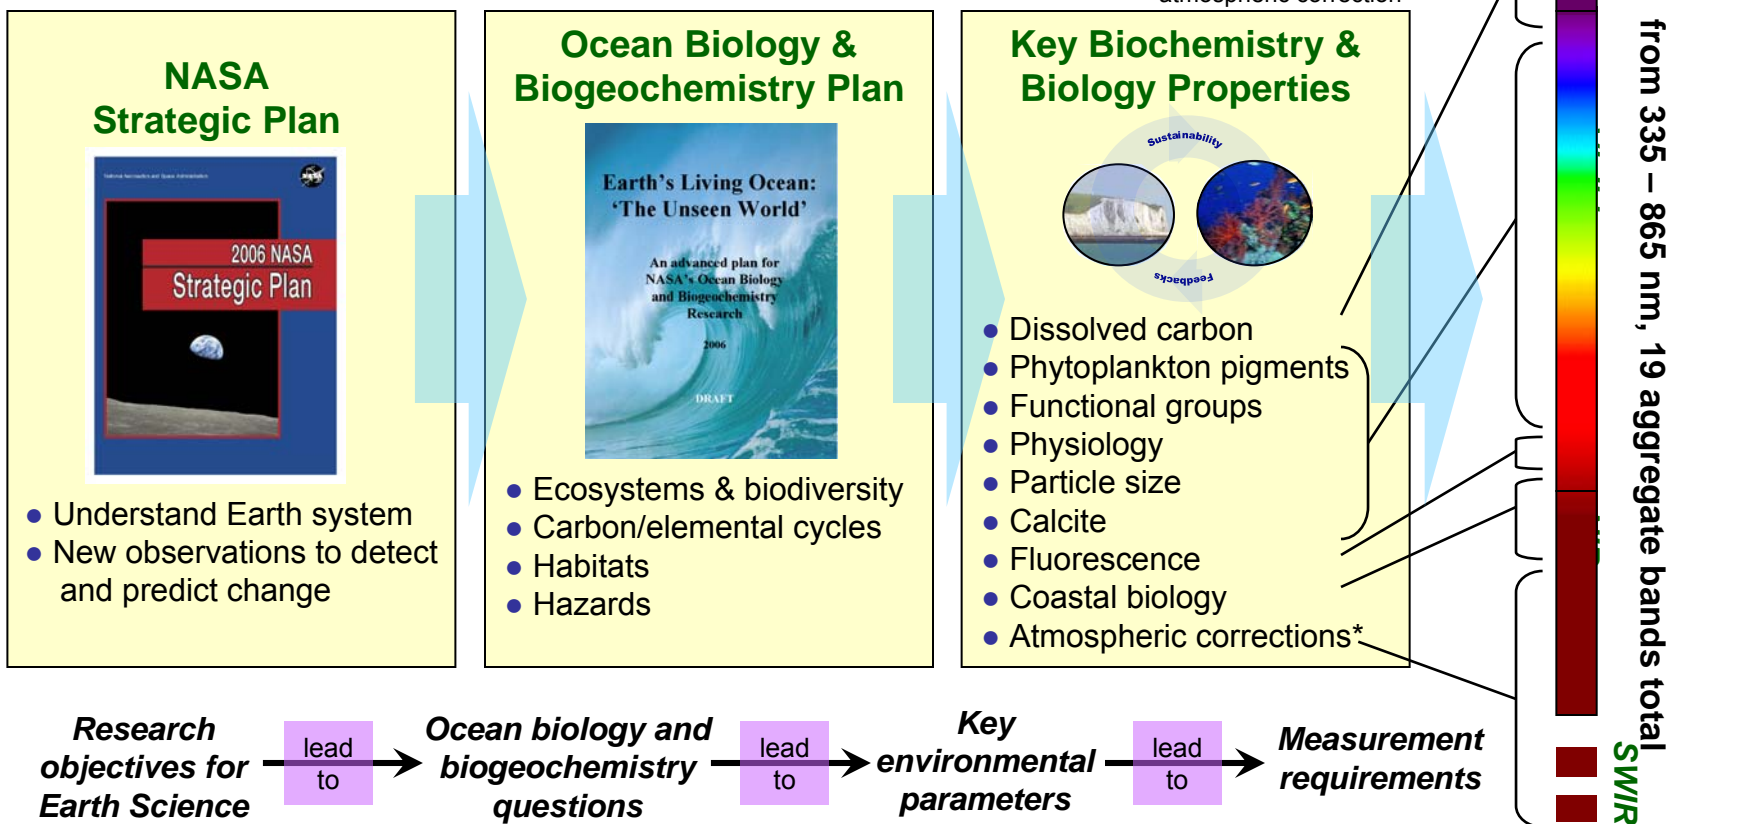



STM-based ACE/ACOB Instrument Requirement

Goddard
Space
Flight Center

Science Requirement	Instrument Type	Mission
Characterization of aerosols types and modal distribution over a broad swath	Multi-angle polarimeter	ACE/ACOB
Altitude of and properties of aerosols/clouds	Backscatter multi-beam /HSR lidar (active)	ACE/ACOB
Cloud microphysics within the cloud	Dual frequency cloud radar (active)	ACE/ACOB
Ocean color	Multi-band spectroradiometer	ACE/ACOB
Cloud height in the IR	IR stereo sensor*	ACE/ACOB
Cloud particle type and ice water path over a broad swath	High frequency μ -wave radiometer*	ACOB
Precipitation and liquid water path over a broad swath	Low frequency μ -wave radiometer*	ACOB



Multi-Beam Lidar




Goddard
Space
Flight Center

Continue profile observations after CALIPSO.

Wider swath for better global coverage:

- multiple beams increase number of statistical-based mission observations
- enables better aerosol emission/source identification
- improved ability to track plumes during long-range transport
- combined lidar and imager observations (e.g. ocean biology)

Beam spacing fine enough to resolve aerosol structure across most plumes, near sources, and for downwind advection

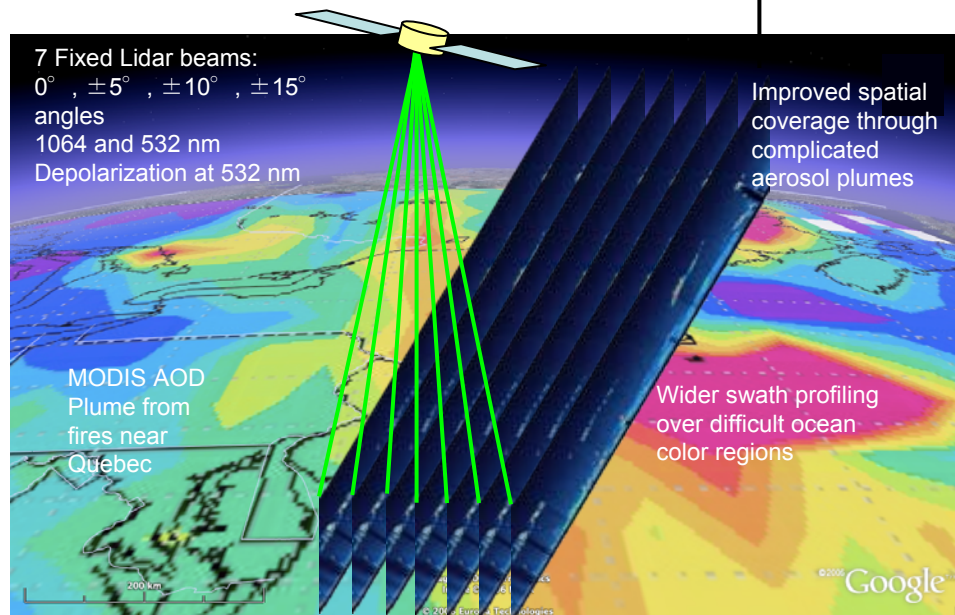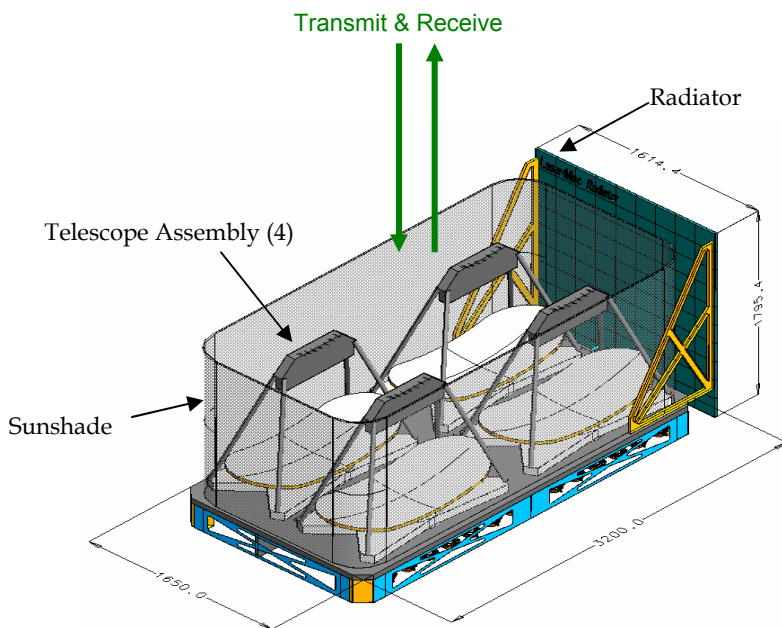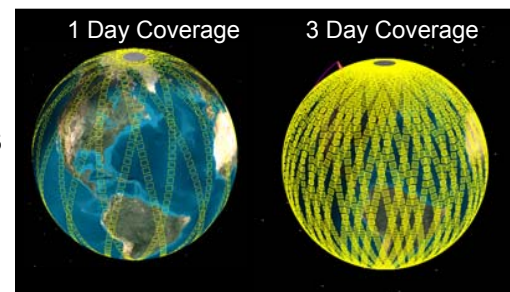



Multiwavelength High Spectral Resolution Lidar (HSRL)

Goddard
Space
Flight Center



➤ Multiwavelength HSRL

- Backscatter at 3 wavelengths (3β) : 355, 532, 1064 nm
- Extinction at 2 wavelengths (2α) : 355, 532 nm
- Depolarization at 355, 532, and 1064 (dust and contrails/cirrus applications)

➤ Retrieved, layer-resolved, aerosol microphysical and macrophysical parameters

- Effective and mean particle radius (errors < 30-50%)
- Concentration (volume, surface) (errors < 50%)
- Complex index of refraction (real: ± 0.05 to 0.1; imaginary (<50% if > 0.01))
- Single scatter albedo (SSA) (± 0.05)

LaRC HSRL
Instrument
Concept

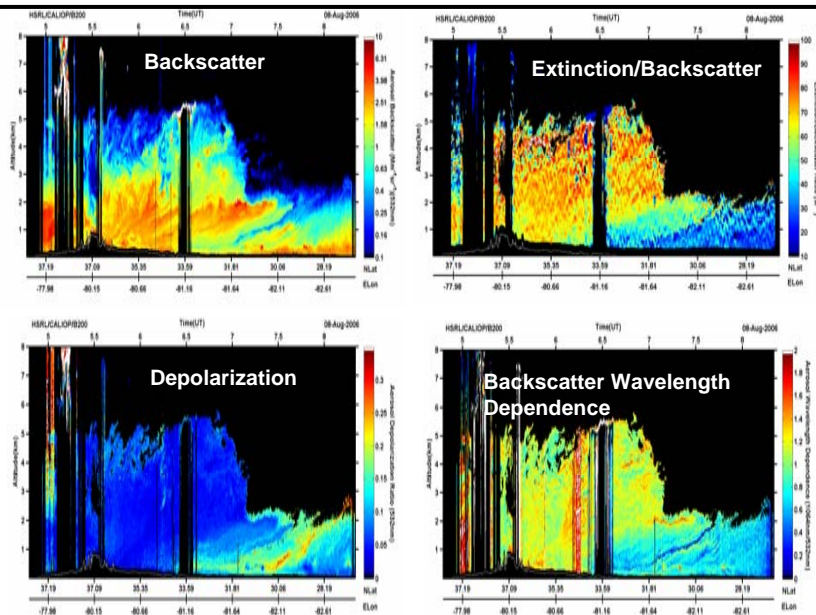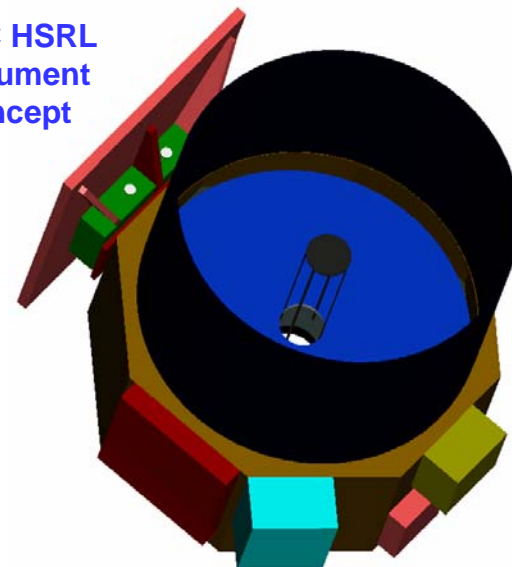

Data from LaRC Airborne HSRL

Aerosol Lidar Information Content

- Aerosol layer heights
- Qualitative vertical distribution (backscatter profile)
- Qualitative aerosol typing information
- Extinction profile derived from backscatter
- Extinction profile using column constraint
- Fine-coarse mode fraction vs. altitude
- Extinction profile
- Complex refractive index vs. altitude
- Aerosol size vs. altitude
- Single scatter albedo vs. altitude
- Concentration vs. altitude

Backscatter Lidar



Backscatter Lidar + Passive



Multiwavelength HSRL







MSPI - Advanced MISR Instrument

Goddard
Space
Flight Center

Multiple cameras with extended spectral range, polarimetry, and wider swath

Synergistic use of multiple techniques reduces retrieval indeterminacies

- multiangle: particle size, shape, retrievals over bright regions (deserts, cities)
- multispectral: particle size (visible and SWIR), absorption and height (near-UV)
 - nominal bands: 380, 412, 446, 558, 650, 865, 1375, 1610, 2130 nm
- polarimetric: size-resolved refractive index and size distribution width
 - nominal bands: 650, 1610 nm

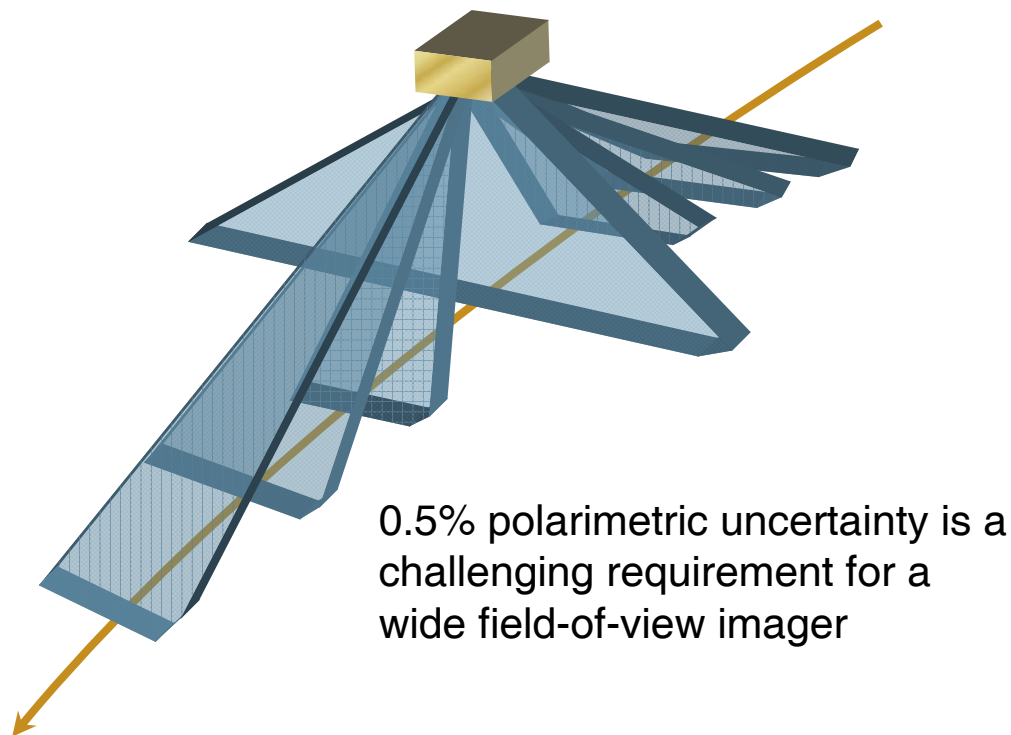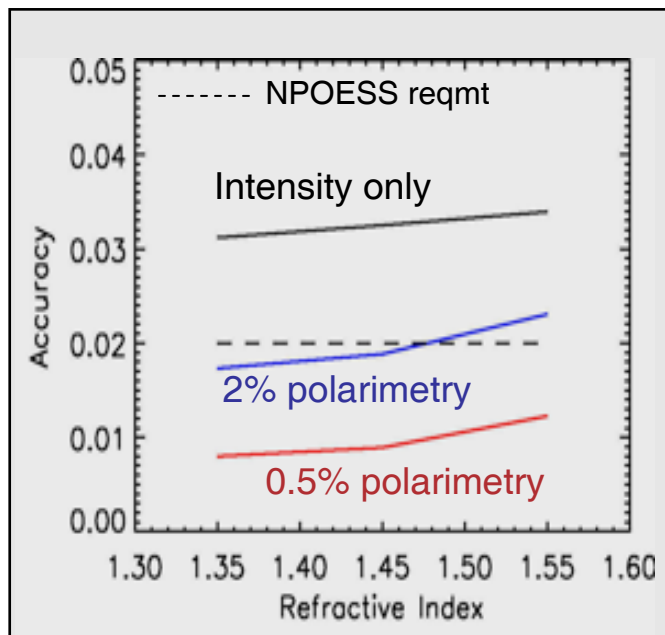



Ocean Color Instrument (ORCA)

Goddard
Space
Flight Center


ORCA is a spectroradiometer designed for ocean remote sensing

Instrument Concept

- Scanning Spectrograph
 - +/-58.3 deg. cross-track scan
 - 2500 km swath
- 98 bands from 335 – 865 nm
- 19 aggregate bands total for ocean science (minimum)

Spectral Range	SNR Specs
Near UV (335-400nm)	750-1500
Visible (400-700nm)	1000-1500
NIR (700-1640 nm)	750-180

- Other bands can be used for aerosol/cloud science
- Two day global coverage from 650km orbit
- Data collected to 75 deg. latitude of sub-solar point
- Monthly lunar calibration maneuver (dark side)
- Daily solar calibration (pole)
- Spectral calibration (solar-based)
- Sun glint avoidance (sensor tilting)
- Five year design life

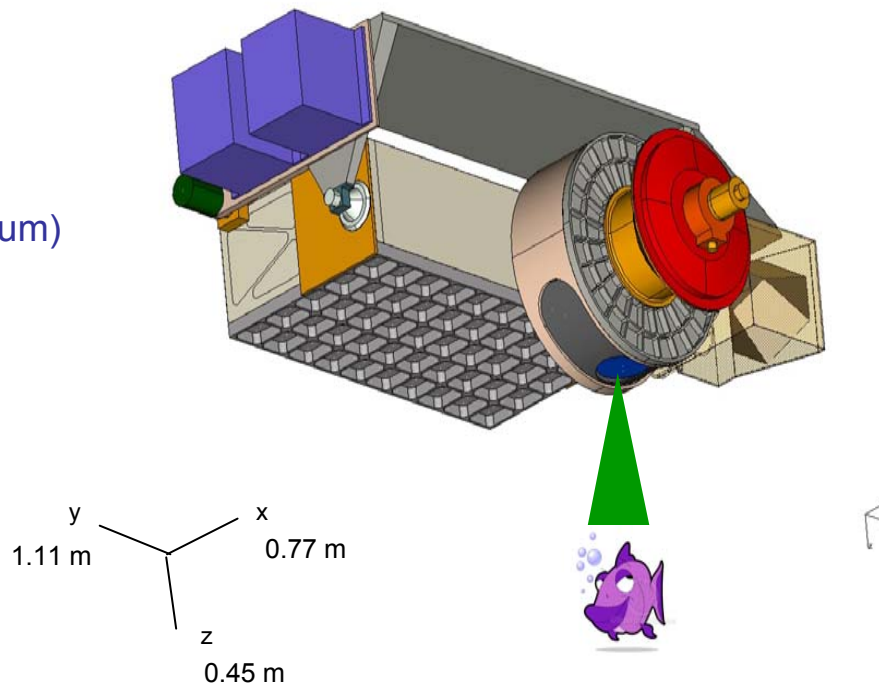

All instrument technologies are TRL ≥ 6




Dual Frequency Cloud Radar

Goddard
Space
Flight Center

Products:

- Cloud top height
- Microphysical profile information
- Particle phase/glaciation height
- Ice Water Content and Cloud Water Content
- Precipitation detection

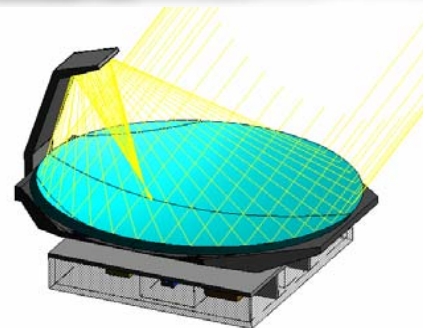

Scientifically Desirable:

- Swath
 - Even a narrow swath will be difficult because of the narrow back scattering phase function
 - It is unlikely that the cloud radar can point more than 10° off nadir
- More sensitivity to precipitation
- Sensitivity to low clouds (aerosols probably have more effect on them)
- Doppler capability not a requirement


Radar Measurement	Cloud/precip structure & microphysics	
Wavelength	94GHz (CloudSat, EarthCare)	94GHz and 34 GHz
Cloud top height (± 1 km)	+	+
Glaciation level	+	+
Precipitation		+
Droplet distribution to 300μ		+
Cloud water content profile	+	+







High Frequency μ -wave Radiometer

Goddard
Space
Flight Center

CoSSIR Nadir T_b (July 28, 2002)

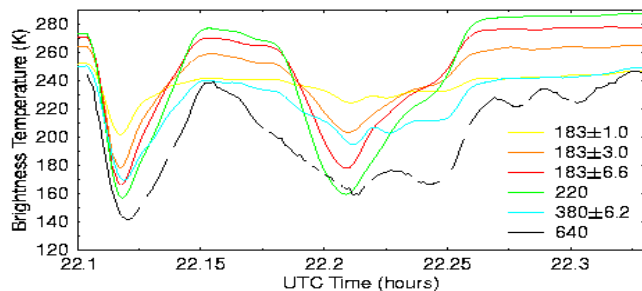


CoSSIR Nadir Cirrus Retrievals

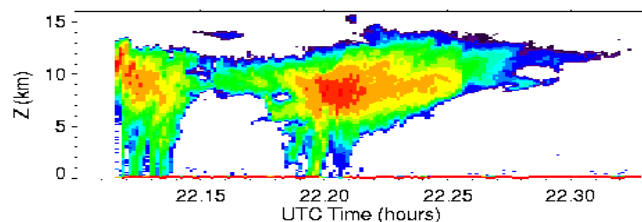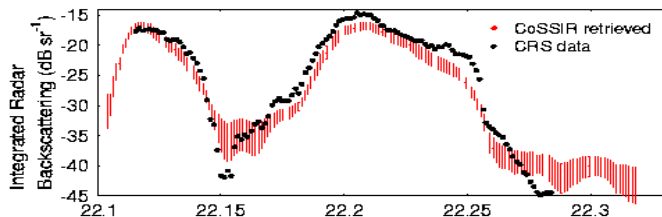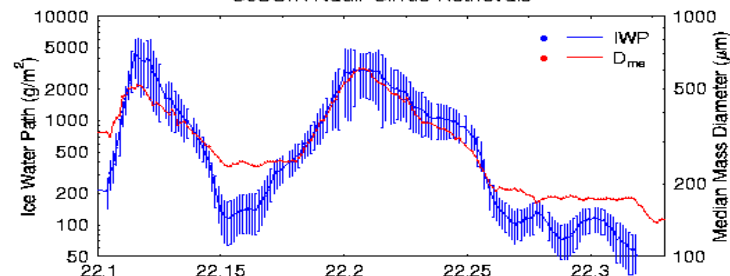

Submillimeter/Millimeter (SM4) Radiometer

- Conical Scanning Imager with 1600 km swath
- 10-km spatial resolution => 0.36° pencil beam
- 6 Receivers > 12 Channels
- Vertical + Dual Polarization at 643 GHz
- {183V, 325V, 448V, 643 V&H, and 874V GHz}
- Three-point calibration (hot, cold, space cold)
- Heritage: MLS, CoSSIR, HERSHEL, MIRO

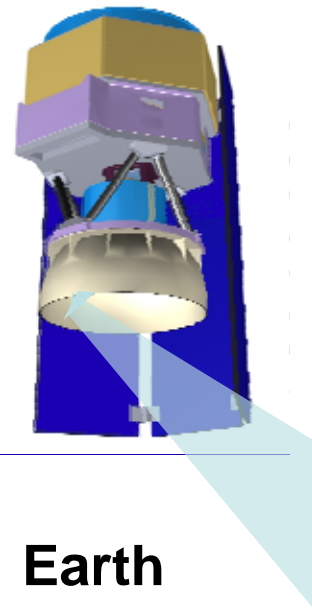



Low Frequency μ -wave Radiometer (GMI)

Goddard
Space
Flight Center

GPM Microwave Imager (GMI) Key Products

- Rain rates from ~0.3 to 110 mm/hr
- Increased sensitivity to light rain over land and falling snow

ACOB-B would be a GPM daughter satellite

Ball Aerospace and Technology
Corporation (BATC) is developing GMI

GMI Key Parameters

Mass (with margin):~150 kg

Power:~125 W

Data Rate:~30 kbps

Antenna Diameter:~1.2 m

Channel Set:

10.65 GHz, H & V Pol

18.7 GHz, H & V Pol

23.8 GHz, V Pol

36.5 GHz, H & V Pol


89.0 GHz, H & V Pol

166 GHz, H & V Pol,
183 \pm 3 GHz, V (or H) Pol

183 \pm 8 GHz, V (or H)

(166 and 183 GHz to have same resolution as 89 GHz)



Overlaps with the HF radiometer

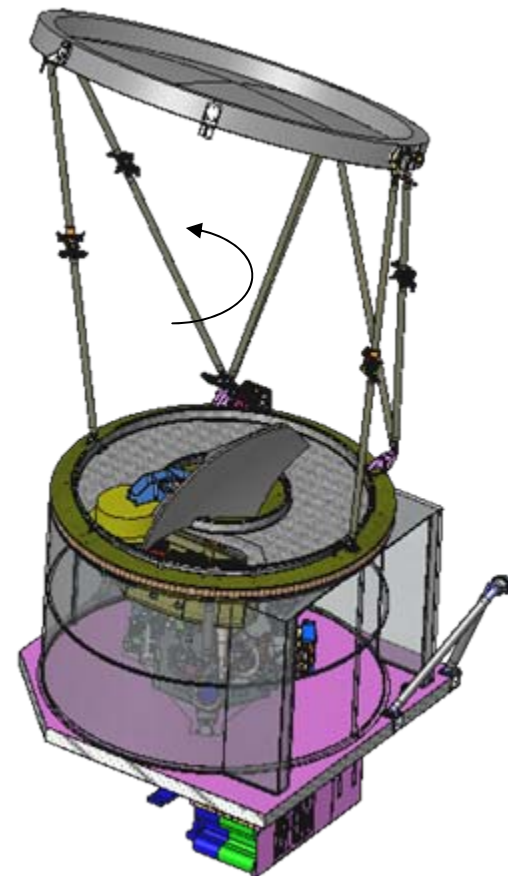





ACE/COB: Two Spacecraft Observing Geometry

Goddard
Space
Flight Center

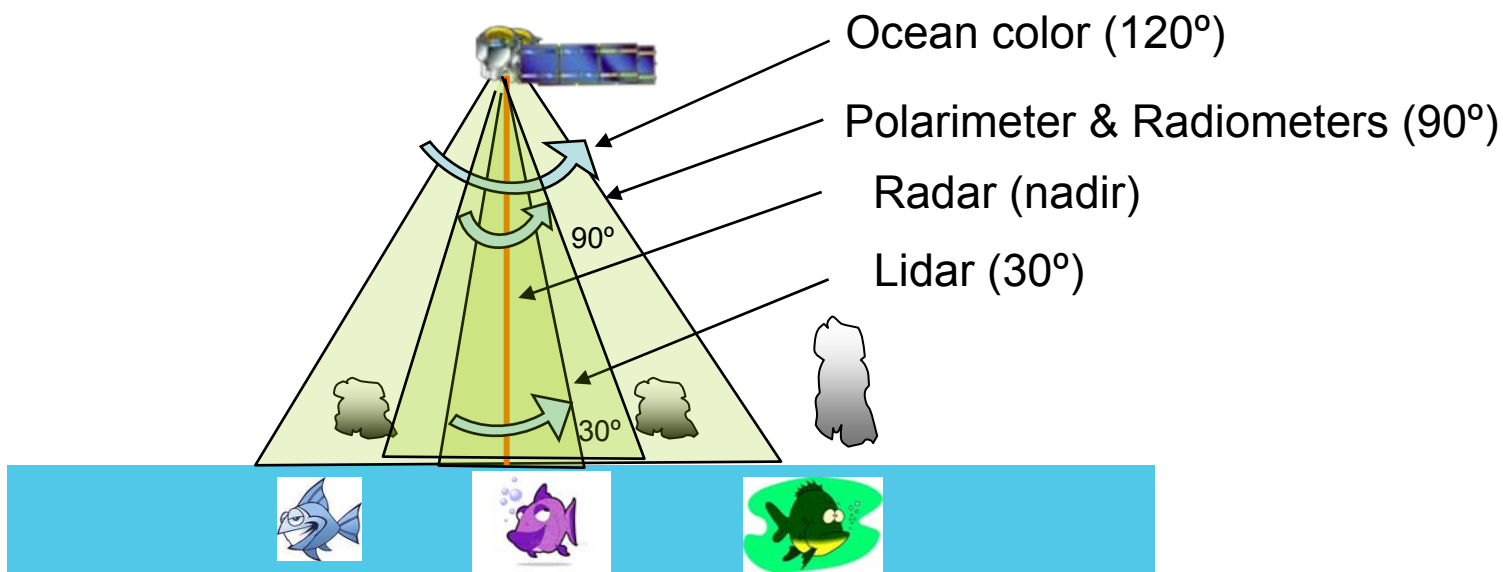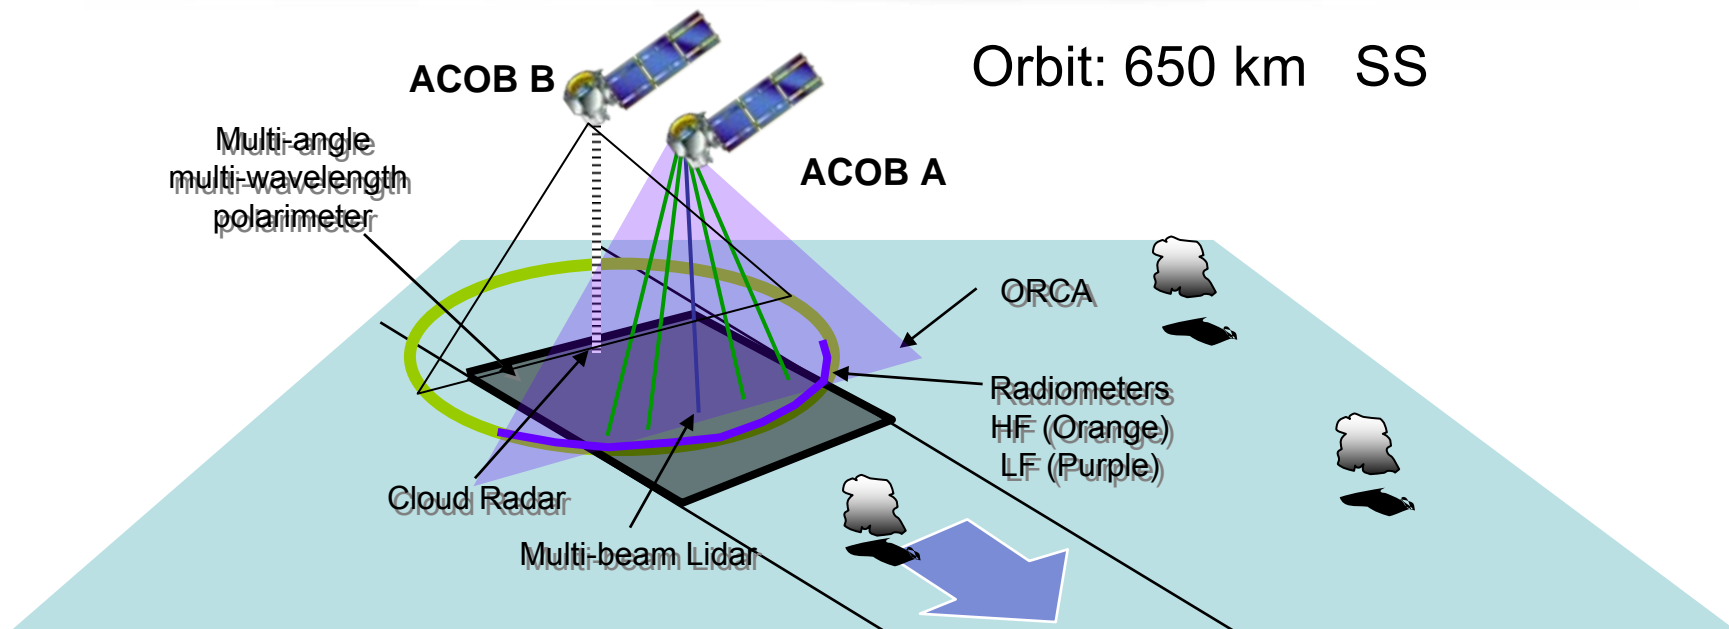

- This JPL version of ACE has four instruments
 - Cloud radar
 - MSPI
 - HSR Lidar
 - Ocean color radiometer
- Modified RSDO spacecraft bus
- 480 km altitude SSO
- Strengths
 - Optimizes orbit for atmospheric science and improves atmospheric measurement sensitivity compared to higher altitude orbit
 - Single Platform is more cost effective (cheaper)
- Weakness
 - Does not include IR measurements or μ -wave radiometers
 - Does not include multi-beam lidar

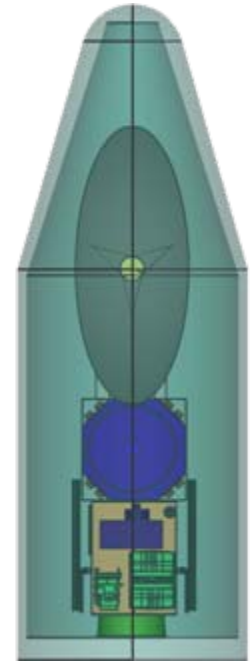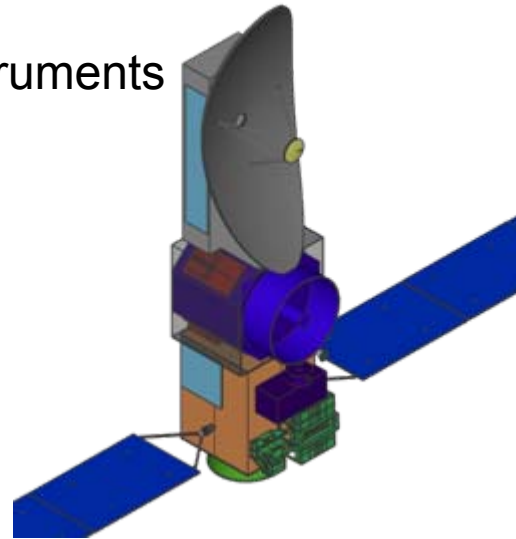



Next Steps with ACE

Goddard
Space
Flight Center

- June '08 science definition team meeting (by invitation)
 - Continue to refine measurement requirements
 - Polarimeter accuracy
 - Radar requirements
 - Lidar requirements
 - Combining instruments (e.g. ocean color and polarimeter)
- 2008-2009
 - Additional instrument and payload studies
 - Development of schedule
- ACE is the most critical climate mission in the 2'd tier NAS group